


75TP1900
P-CAP




75TP1900

OSD Controls

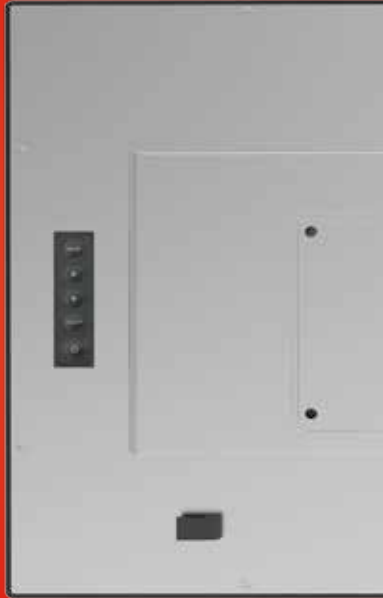

Kensington Lock

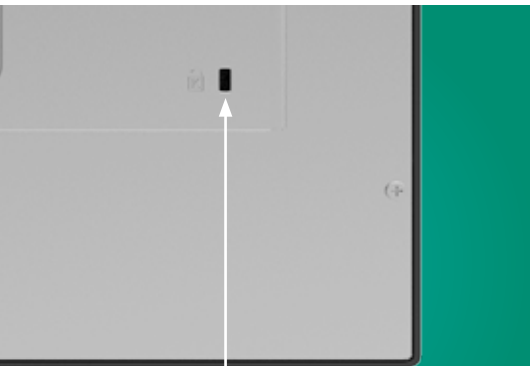

Vesa 100x100 mount or bracket mount

Specification

75TP1900	
Size	19" TFT LCD
Maximum Resolution	1280 x 1024
Contrast Ratio	1000:1
Brightness (Backlight Type)	250 nits (No Touch), 225 nits (Projected Capacitive)
View Angle	H:170°, V:160°
Touch LCD Display	
Touch Screen	Projected Capacitive
Touch Points	10
Touch Screen Interface	USB-HID (Type B)
IO ports	
Serial Port	1 x RJ11 (For remote key)
USB Port	1 x USB 2.0 (Type B) for Touch Interface (USB-HID)
Video Port	1 x VGA (DB15), 1 x DVI
Audio Port	NA
Power Input	1 x 2.1 mm 12V DC Jack
Physical Properties	
Power Supply	50W (12V, 4.16A) External Power Adaptor
Speaker	NA
Housing Color	Black, Silver (No Paint on Back)
Construction	Glass, SECC Metal
Compliance	IP65 Compliant Front Side, IPX1
Dimensions (W x H x D) mm	416.0 x 344.0 x 46.6 mm
Net Weight (kg)	4.4 kg
Gross Weight (kg)	6.3 kg
Carton (W x H x D) mm	500.0 x 425.0 x 133.0 mm
VESA	100 x 100 mm
Safety	
Certifications	CE, FCC B Class, RoHS
Environment	
Operating Temperature	0°C ~ 40°C, 20% ~ 80% RH. Non-Condensing
Storage Temperature	-20°C ~ 60°C, 10% ~ 90% RH. Non-Condensing