

# 75TP1010

10.1" P-CAP

Open Frame Monitor



**DISPLAY  
SOLUTIONS**





# 75TP1010

IP 65 Ingress Protection  
Front Bezel




Convenient Cable Management

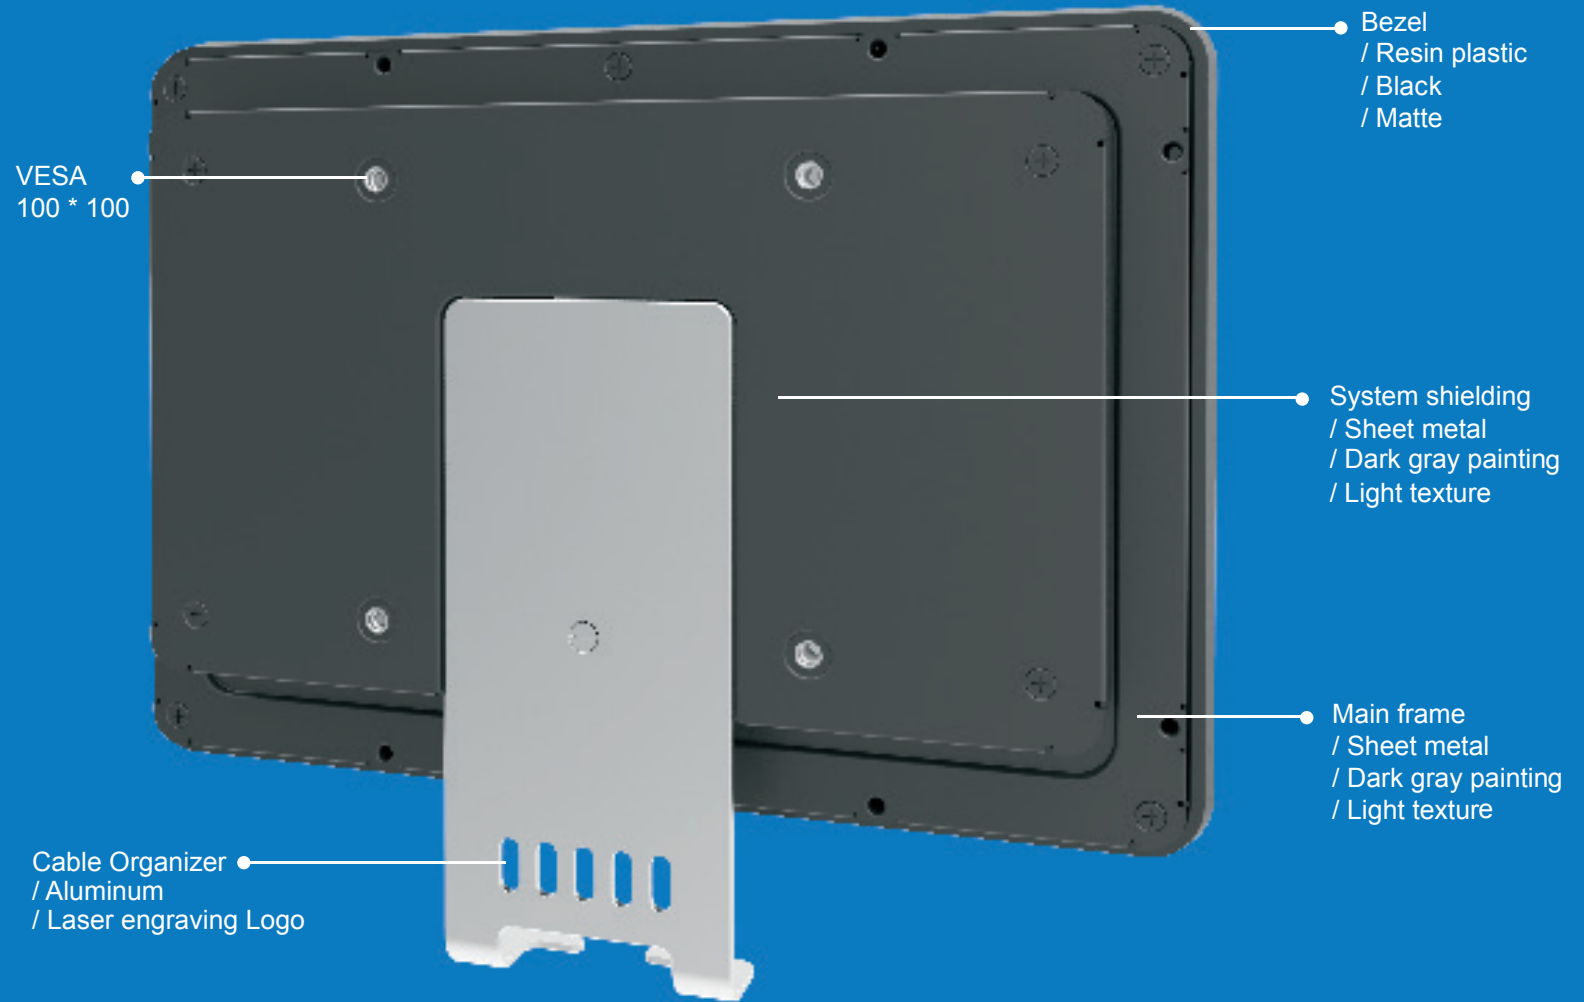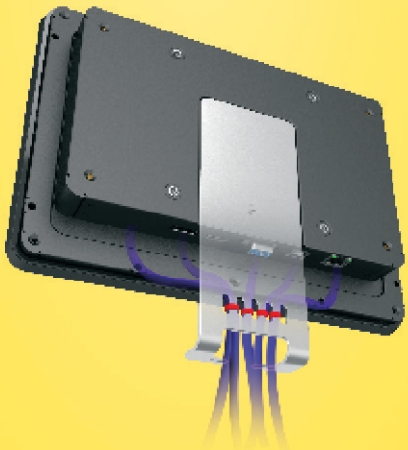


# Features

## I/O Port

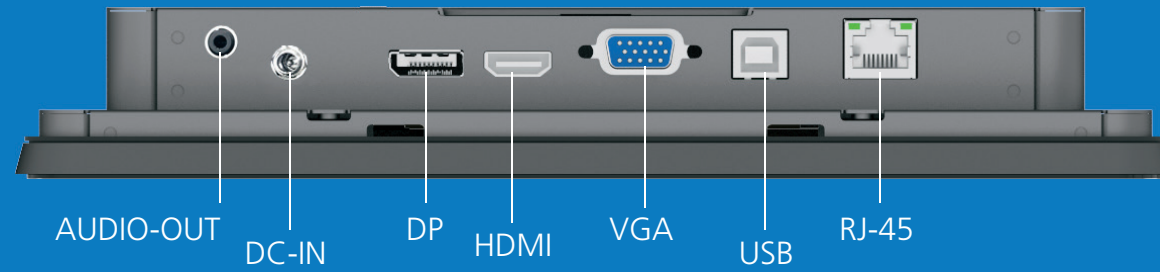

VESA Mount 100 x 100 mm  
Side Bracket Mount (optional) support

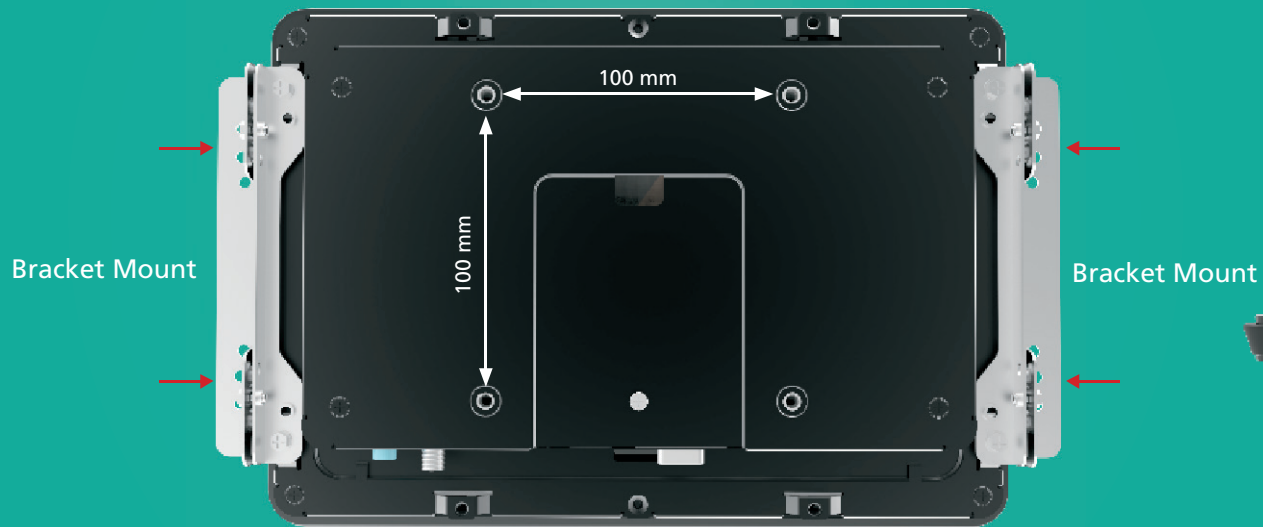

Slim Design ideal for  
Embedding Installation



# Specification

75TP1010	
Size	10.1" TFT LCD
Maximum Resolution	1280 x 800
Contrast Ratio	1300:1
Brightness (Backlight Type)	500 nits (No Touch), 425 nits (Projected Capacitive)
View Angle	H:170°, V:170°
Touch LCD Display	
Touch Screen	Projected Capacitive
Touch Points	10
Touch Screen Interface	USB-HID (Type B)
IO ports	
USB Port	1 x USB 2.0 (Type B) for Touch Interface (USB-HID)
Video Port	1 x VGA (DB15), 1x DP, 1 x HDMI
Audio Port	1 x Line-Out
Remote Control Port	1 x RJ-45 for Remote Key
Power Input	1 x 12V DC Jack with Lock
Physical Properties	
Power Supply	36W (12V@3A) External Power Adaptor
Housing Color	Black
Material	Glass, Plastic (ABS), SECC Metal
Ingress Protection	Front Side IP65 Compliant
Dimensions (W x H x D) mm	260.7 x 183.4 x 39.4
Net Weight (kg)	1.4 kg
Gross Weight (kg)	2.4 kg
Carton (W x H x D) mm	310 x 160 x 370
VESA	100 x 100 mm
Ball Drop / IK	UL60950(500g/1.3m) and IK08
Compliance	
Certifications	CE (B), FCC Class B, CCC (B), UL, cUL, RCM, RoHS
Environment	
Operating Temperature	0°C ~ 50°C, 20% ~ 80% RH. Non-Condensing
Storage Temperature	-20°C ~ 60°C, 10% ~ 95% RH. Non-Condensing
Optional Peripherals	
Remote Key	1 x RJ-45 (for OSD connector)

※ Specification is subject to change without notice