


SPECIFICATION

SPECIFICATION					
Art No.		18-0106-8		Size	3 INCH
No.	Item	Standard		Test Condition	
1	VOICE COIL IMP.	8 OHM ± 15 %		AT 400 HZ.	1.0 V
1	VOICE COIL IMP.	7.2 OHM ± 15 %		AT 400 HZ.	1.0 V
3	BUZZES & RATTLES	MUST BE NORMAL		SINE WAVE 8.0 V/60~ 1500HZ	
4	RESONANT FREQ.f	140 ± 20% HZ			
5	OUT-PUT S-P-L	88.0± 2dB	MEAN VALUE AT 0.6 , 0.8 , 1.0, 1.2 KHZ	AT 1W ON AXIS CALCULATED FROM 1m MEASUREMENT.	
6	FREQ.RESPONSE	f _o ~20KHZ	OUT PUT SPL -10dB		
7	RATED POWER INPUT	10 W		SINE WAVE PROGRAM SIGNAL	
8	MAX.POWER INPUT	15 W			
9	DISTORTION	5% Less MAX.		RATED POWER INPUT.	
10	LOAD TEST	AFTER TEST MEET ITEM 2. & 3.		☐ WHITE NOISE W , HOURS ☒ PINK NOISE 10 W , 24 HOURS	
11	HEAT TEST	AFTER TEST MEET ITEM 2. & 3.		70±2℃ 20~25% R.H. 24 HOURS	
12				40±2℃ 90~95% R.H. 24 HOURS	
13	FLUX DENSITY	GAUSS			
VOICE COIL				CONE PAPER	
BOBBIN MATERIAL		☐ PAPER ☐ NSV ☒ ASV ☐ KAPTON ☐ TIL		DIAPHRAGM MATERIAL	☐ PAPER COATING ☒ PAPER ☐ MYLAR ☐ P.P ☐ bulletproof
WIRE MATERIAL		☒ LOCK ☐ SV ☐ CCAW ☐ ()		EDGE MATERIAL	☐ PAPER ☐ RUBBER ☒ FORM ☐ CLOTH
VOICE COIL I.D.(min)		φ inch φ14 mm	TOP PLATE THICKNESS		3mm
MAGNET				FRAME	
WEIGHT		Main: gr Oz	MATERIAL		☐ PLASTICS ☒ Fe ☐ AL
SIZE		Main:φ60 *φ32 * 10 tmm		FINISH	☒ BLACK PAINTING ☐ ZINC PLATED ☐ COLOR
MATERIAL		☐ ALNICO ☒ FERRITE		DUST CAP MATERIAL	
		☐ Nd-Fe-B ()			
QUALITY INSPECTION LEVEL					

Sound Wave Graph

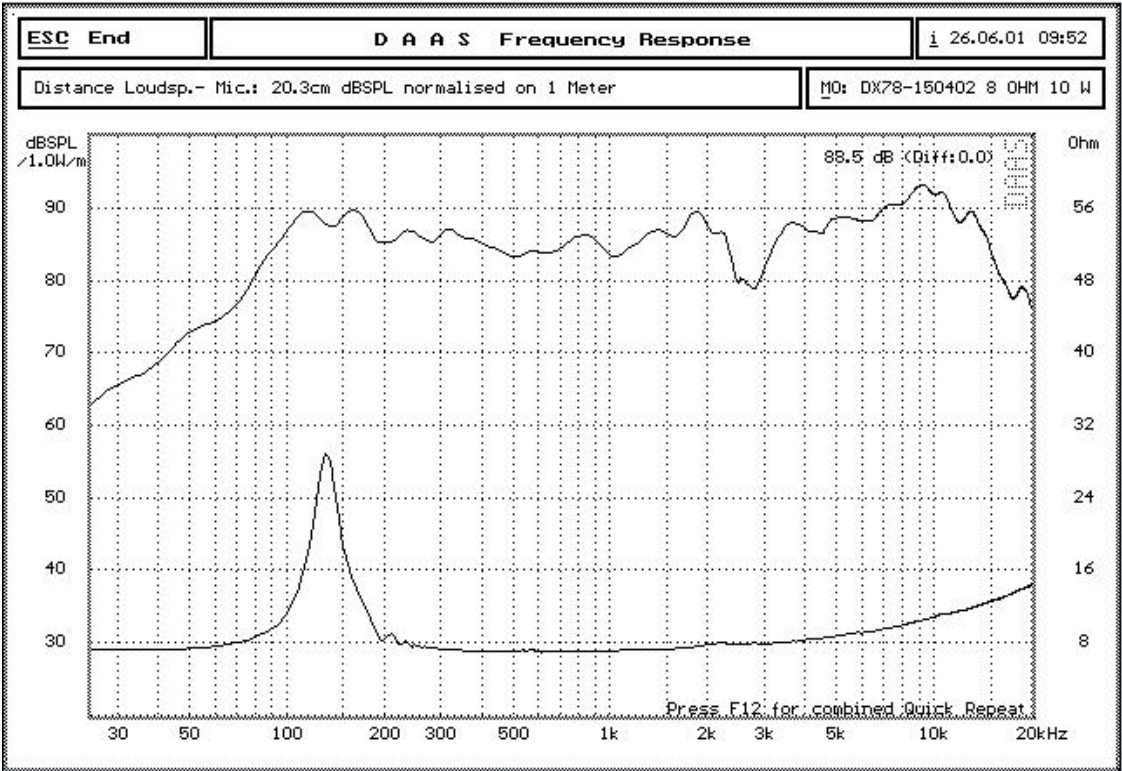

Size

